

SPP-LLPL™ Coaxial Cables

ISO 9001 Certified

In-Building, Low Loss, Low PIM, Plenum Rated Cable Assemblies


- *Excellent PIM (typically -160 dBc) for optimum system performance*
- *UL910 plenum rated satisfying building code requirements*
- *Super flexible for ease of installation*
- *Corrugated copper outer conductor providing greater than 100dB shielding*
- *Wideband low VSWR typically 1.15:1 from 50 to 6000MHz covering all in-building technologies*
- *Durable FEP outer jacket is suitable for outdoor use*



SPP250, SPP375 & SPP500 - LLPL 50 Ohm low loss low PIM coaxial cable assemblies


- Standard assemblies in 1, 2 and 3 meter lengths with popular connector combinations
- 100% tested for static and dynamic PIM, VSWR and Insertion Loss
- Custom length assemblies are available
- 10 year Times Microwave warranty

Typical VSWR

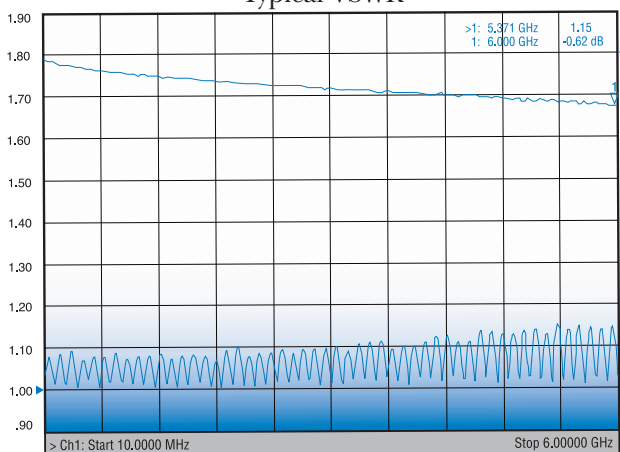


SPP250NMNM1.0M

Dynamic PIM Test Results

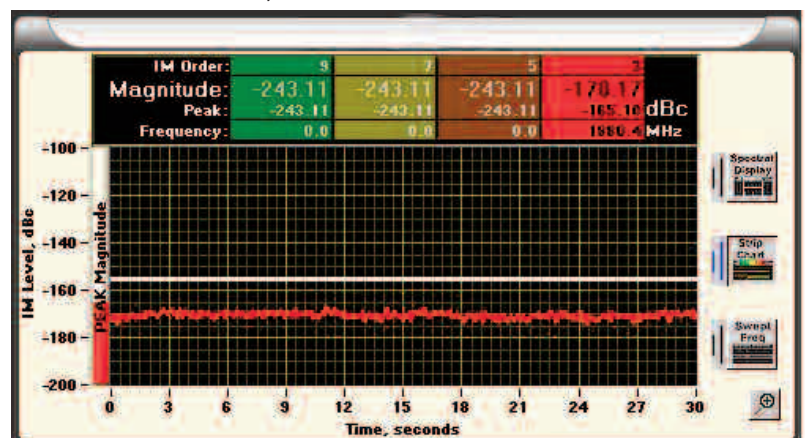

SPP-LLPL™ Coaxial Cables

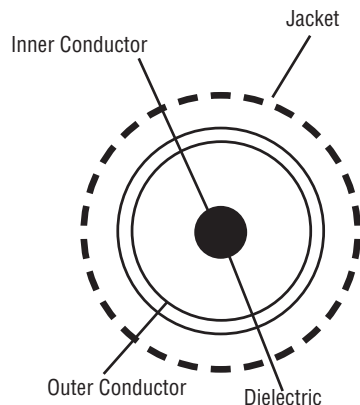

Cable Construction

Inner Conductor: Solid bare copper

Dielectric: Tape wrapped low density PTFE


Outer Conductor: Seam welded corrugated copper tube

Jacket: Extruded FEP

Physical Specifications		SPP250	SPP375	SPP500
Cable Stock Codes:		15314	15318	15319
Jacket: Extruded FEP; OD: in(mm)		0.280 (7.1)	0.402 (10.2)	0.500 (13.4)
Outer Conductor: Corrugated Copper Tube; OD: in(mm)		0.250 (6.3)	0.380 (9.6)	0.472 (12.1)
Dielectric: LD PTFE OD: in(mm)		0.190 (4.8)	0.285 (7.1)	0.370 (9.4)
Center Conductor: Solid BCCAI; OD: in(mm)		0.068 (1.7)	0.100 (2.7)	0.136 (3.5)
Bend Radius: in(mm)		1.25 (32)	1.38 (35)	1.50 (38)
Bending Moment: ft-lbs (N-m)		0.8 (1.0)	1.7 (2.0)	2.0 (2.4)
Tensile Strength: lb (kg)		150 (68.2)	175 (79.5)	210 (95.5)
Flat Plate Crush Strength: lb/in (kg/mm)		100 (1.8)	100 (1.8)	110 (2.0)
Weight: lbs/1000 ft (kg/km)		66 (78)	115 (127)	200 (167)
Environmental Specifications				
Installation Temperature Range °C/°F		-55/+200 (-67/+392°)	-55/+200 (-67/+392°)	-55/+200 (-67/+392°)
Storage Temperature Range °C/°F		-55/+200 (-67/+392°)	-55/+200 (-67/+392°)	-55/+200 (-67/+392°)
Operating Temperature Range °C/°F		-55/+200 (-67/+392°)	-55/+200 (-67/+392°)	-55/+200 (-67/+392°)
Electrical Specifications				
Velocity of Propagation: %		76%	76%	76%
Impedance: Ohms		50 Ohms	50 Ohms	50 Ohms
Capacitance: pF/ft (pF/m)		27.0 (8.2)	27.5 (8.4)	29.0 (8.8)
Inductance: μH/ft (uH/m)		0.067 (0.22)	0.067 (0.22)	0.069 (0.23)
Shielding Effectiveness: dB		>100	>100	>100
Passive Intermodulation (PIM): dBc		<-160	<-160	<-160
Center Conductor DC Resistance: Ohms/1000 ft/(km)		3.0 (9.84)	1.30 (4.26)	0.82 (2.70)
Shield DC Resistance: Ohms/1000 ft (km)		2.00 (6.56)	1.52 (4.98)	1.00 (3.28)
Attenuation & Average Power @ MHz		dB/100 ft (dB/100m) kW	dB/100ft (dB/100m) kW	dB/100ft (dB/100m) kW
	450	3.8 (12.4) 0.97	2.8 (9.2) 2.01	2.3 (7.5) 2.50
	900	5.4 (17.7) 0.68	3.7 (12.1) 1.41	3.3 (10.8) 1.75
	2000	8.3 (27.2) 0.46	5.7 (18.7) 0.93	5.1 (16.7) 1.15
	5800	14.8 (48.5) 0.26	10.3 (33.8) 0.53	9.2 (30.2) 0.65
Connectors (solder body, bulk packaged - 50/pkg)				
N Male Straight		TC-SPP250-NM-LP (3190-2833)	TC-SPP375-NM-LP (3190-2951)	TC-SPP500-NM-LP (3190-2946)
N Male Right Angle		TC-SPP250-NM-RA-LP (3190-2834)	-	-
N Female		TC-SPP250-NF-LP (3190-2851)	-	TC-SPP500-NF-LP (3190-3011)
N Female Bulkhead		TC-SPP250-NF-BH-LP (3190-2835)	-	-
7-16 DIN Male Straight		TC-SPP250-716M-LP (3190-2853)	TC-SPP375-716M-LP (3190-2940)	TC-SPP500-716M-LP (3190-2945)
7-16 DIN Male Right Angle		TC-SPP250-716M-RA-LP (3190-2854)	-	-
SMA Male Straight		TC-SPP250-SM-LP (3190-2947)	-	-
4.1/9.5 mini DIN Male Straight		TC-SPP250-4195M-LP (3190-3014)	-	-
7-16 DIN Female Straight		TC-SPP250-716F-LP (3190-3002)	-	-
Connectors (Field Installable, non solder)				
N Male Right Angle		EZ-SPP250-NM-RA-LP (3190-2965)	-	-
7-16 DIN Male Right Angle		EZ-SPP250-716M-RA-LP (3190-2966)	-	-
Tools				
Strip Tool		ST-SPP-250 (3192-154)	ST-SPP-375 (3192-167)	ST-SPP-500 (3192-168)
Debur Tool		DBT-U (3192-001)	DBT-U (3192-001)	DBT-U (3192-001)
Cutting Tool		CCT-01 (3190-1544)	CCT-01 (3190-1544)	CCT-01 (3190-1544)

SPP-LLPL™ Coaxial Cables

Smart Part Number Key for SPP Low PIM Jumpers

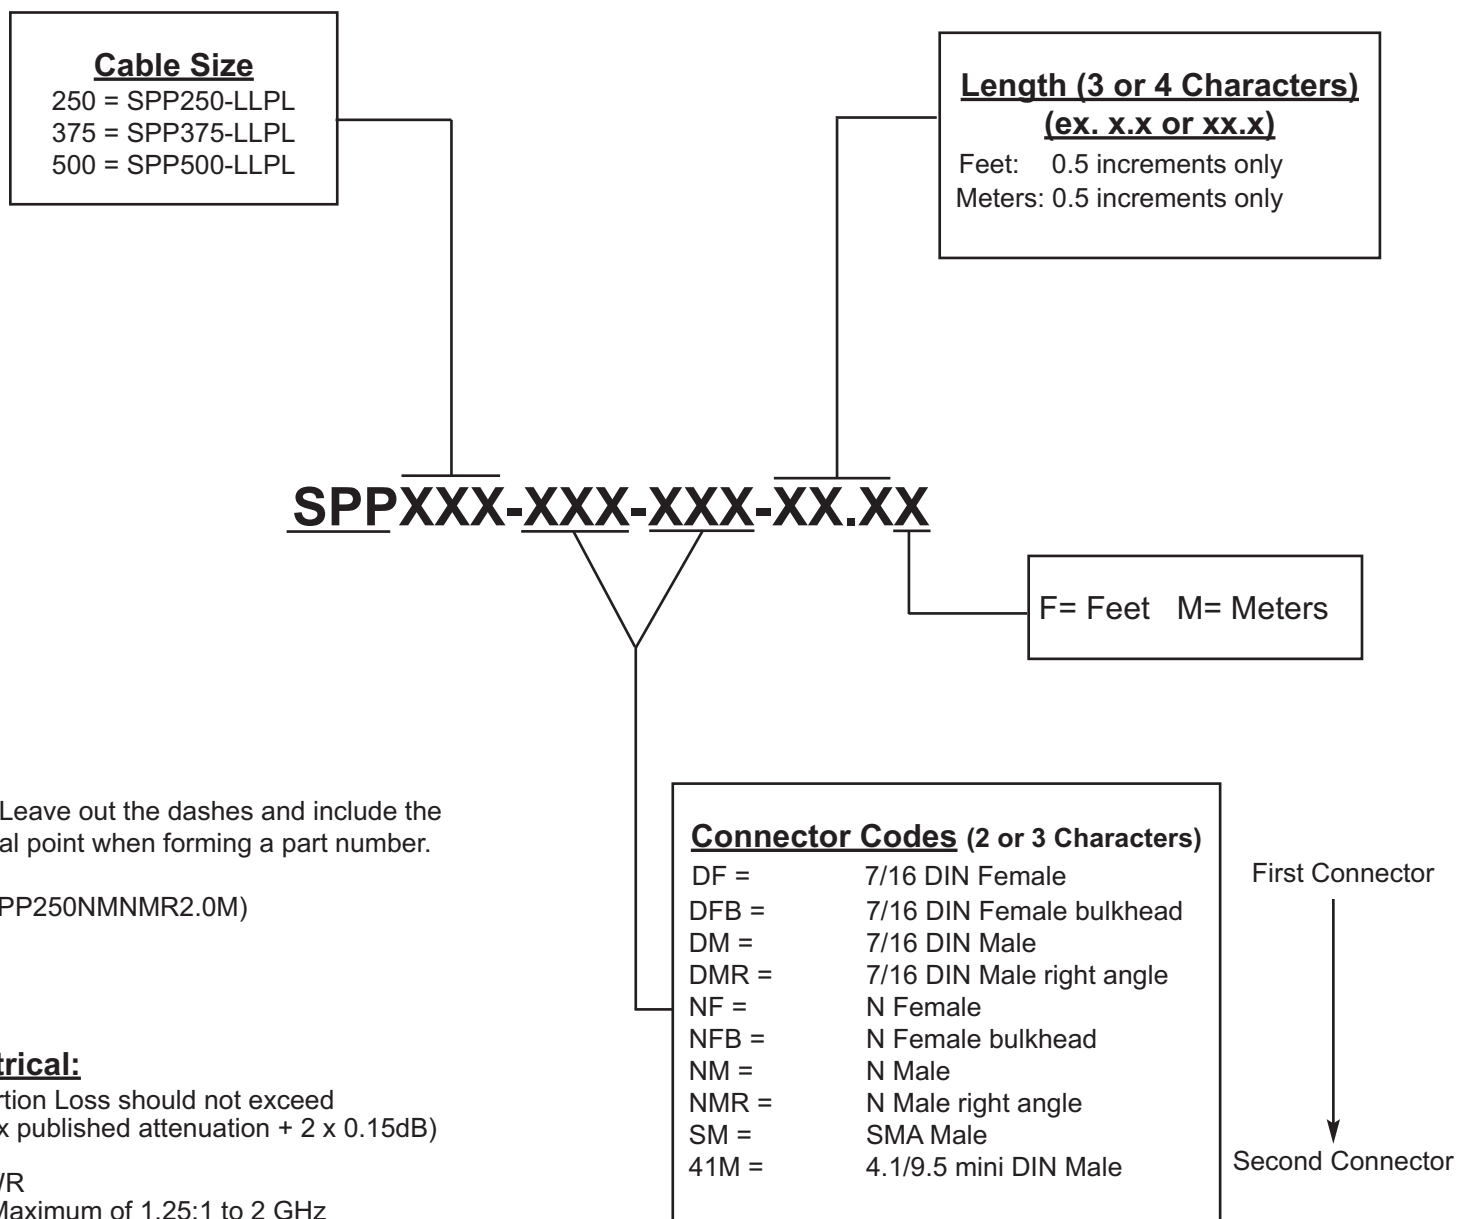

Note: Leave out the dashes and include the decimal point when forming a part number.

(ex. SPP250NMNMR2.0M)

Electrical:

- Insertion Loss should not exceed (1.1 x published attenuation + 2 x 0.15dB)
- VSWR
 - Maximum of 1.25:1 to 2 GHz
 - Maximum of 1.35:1 to 6 GHz

Many assembly configurations are available from stock.
Refer to the on-line [Price List](#) for specific configurations.

SPP-LLPL™ Coaxial Cables

About TIMES MICROWAVE SYSTEMS

Times Microwave Systems, was founded in 1948 as the Times Wire and Cable Company. Today, the company specializes in the design and manufacture of high performance flexible, semi-flexible and semi-rigid coaxial cable, connectors and cable assemblies. With over 60 years of leadership in the design, development, and manufacture of coaxial products for defense microwave systems, Times Microwave Systems is the acknowledged leader, offering high tech solutions for today's most demanding applications.

Cable assemblies from Times Microwave Systems are used as interconnects for microwave transmitters, receivers, and antennas on airframes, missiles, ships, satellites, and ground based communications systems, and as leads for test and instrumentation applications.

As a highly specialized and technically focused company, Times Microwave Systems has been able to continually meet the challenges of specialty engineered transmission lines for both the military and commercial applications, drawing upon our:

- Thousands of unique cable and connector designs
- Exceptional RF and microwave design capability
- Precise material and process controls
- Unique in-house testing capabilities including RF shielding/leakage, vibration, moisture/vapor sealing, phase noise and flammability
- Years of MIL-T-81490, MIL-C-87104, and MIL-PRF-39012 experience
- ISO 9001 Certification

In 2010, Times Microwave Systems introduced its Times-Protect™ line of lightning and surge protection solutions to address the challenging needs of wireless systems in the 21st century.

With over 60 years of Times Microwave Systems aerospace cable and connector technology experience and unparalleled design expertise, Times Microwave Systems' staff of Field Applications Engineers can help to provide the right solution for your interconnect applications.



SPP-LLPL 3/14

World Headquarters: 358 Hall Avenue, Wallingford, CT 06492 • Tel: 203-949-8400, 1-800-867-2629 Fax: 203-949-8423

International Sales: 4 School Brae, Dysart, Kirkcaldy, Fife, Scotland KY1 2XB UK • Tel: +44(0)1592655428

China Sales: TMC Building 4, No. 318 Yuanshan Road, Xinzhuang Industrial Park, Shanghai, China 201108 Tel: 86-21-5176-1209 Fax: 86-21-64424098
www.timesmicrowave.com