





	Materials	Plating	Thickness
Body	Brass	Albaloy	2μm (80μ")
Center Pin	Brass	Silver	5μm (200μ")
Insulator	PTFE	-	-
Gasket	Silicone Rubber	-	-
Impedance	50ohm		
Frequency	DC-6GHz		
VSWR	1.25(TYP.) below 3GHz; 1.35(TYP.) @3-6GHz		
Insertion Loss	0.1x√F(GHz)		
3rd Intermodulation	-160dBc @2x20W		
IP Rating	IP67(mated)		
Standard	Compatible with IEC 61169-54		

Test Curve

*Based on 3 feet TFT-401 cable assembly terminated with referenced connector on each end.

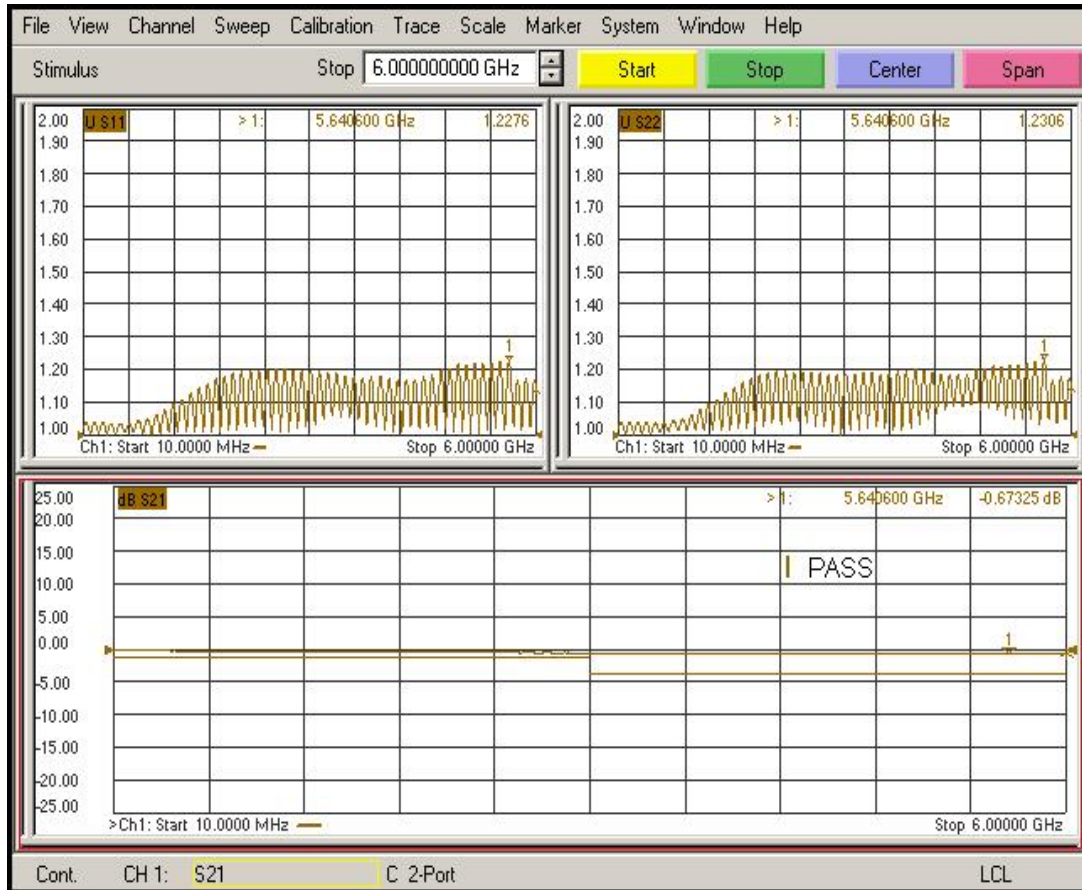

PIM Test

Date: 2015/5/11

Time: 13:48

Passive IM Test Results

Description

[Enter Test Description]

Model Number

[Enter Model Number]

Serial Number

Operator


[Enter Operator]

Carrier Status

ALC is on	Frequency	Measured Power	Requested Power	Offset
CARRIER 1	1805.0 MHz	43.0 dBm	43.00	0.0 dB
CARRIER 2	1880.0 MHz	43.0 dBm	43.00	0.0 dB

Passive IM Response

Order:	0	0	0	3
Magnitude:	-999.00	-999.00	-999.00	-169.55
Peak Magnitude:	-999.00	-999.00	-999.00	-169.00
Frequency:	0.0	0.0	0.0	1730.0 MHz

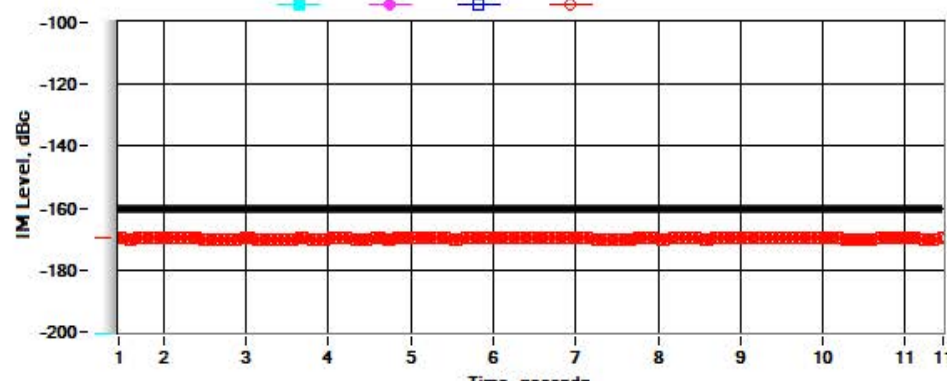

PORT 1 REVERSE IM

Kaelus Virtual Front Panel (v11.6.0.9): New
Rev. 11.6.0.9